

COMFORT FABRIC WALL PANELS

SPECIFICATION DATASHEET

APPLICABLE CLAUSES: UNICLASS - Ss 25 25 05 Acoustic Panel Systems
CWAS - K13 170 Acoustic Panel Lining


Description: Comfort Fabric Wrapped Wall Panels

System Performance: Class A – 40mm thick Direct Fix

System Supplier: London Wall Design Ltd
63 Barwell Business Park, Leatherhead Road
Chessington, KT9 2NY
Tel: 0208 391 8750
Email: info@londonwall.co.uk
Web: [Sound Absorption Products - London Wall](#)

Battens: Direct Fix or Split Batten Method if airgap required

Acoustic Performance:

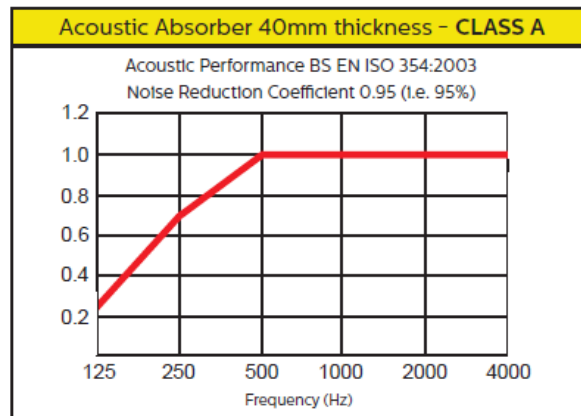

Directly fixed to wall or ceiling.

Panelling: Acoustic Sound Absorbing Foam Core finished in our standard range fabric, Camira Sonus or Cara

Fire: Core Board EN13501-1:2018 A2-s1, d0 and BS476: Part 6 and 7, BS6853 Annex B2 / D.8.4
Sonus EN13501-1, Class B, s1, d0
Cara Class 1 to BS476: Part 7 and EN13501-1, Class B, s1, d0

Weight: 40mm thick = 2kg/m²

Standard Panel Sizes: 1200mm (w) x 900/1200/1800/2100/2400/2700mm (h)
Other shapes & sizes or site specific sizing available on request

Dimension Tolerance of Panels: +/- 8mm

Installation: Easy Peel Self Adhesive Backing, Spray Adhesive to Fitting Surfaces
Recommended for Ceiling Applications